

Application

This product is widely used in the inflammable and explosive places coal mine underground area.

Characteristics

- Its light source is used of internationally famous brand, give 20% more light than the other manufacturer's.
- The average life span of the light source is as long as 10,000 hours, low maintenance.
- Its advanced transparent part with optimized design according to optical principles, featuring gentle light, even lighting, no dazzle or double image.
- The housing adopts high-tech static spaying treatment, strong resistant to corrosion, water and dust, applicable to various harsh environments.
- Easy to operate.


Main specification

Input Voltage	AC127V
Frequency	50Hz
Ingress Protection	IP65
Anti Corrosion Grade	WF2
Insulation Grade	I
Space Height Ratio	5
Thread	G3/4"
Leading-in cable diameter	φ 8mm - φ 14mm
Dimension	350x300x220mm
Net Weight	8.5Kg


Ordering reference

Ordering Reference	Light Source	Rated wattage (W)	Light output (lm)	Lamp average life(hours)
DGS70/127B(C)	Metal Halide Lamp	70	5,500	10,000

Light distribution curve

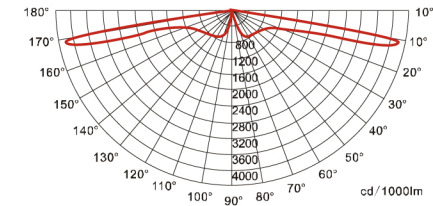

Drawing of dimension (Dimensions in mm)

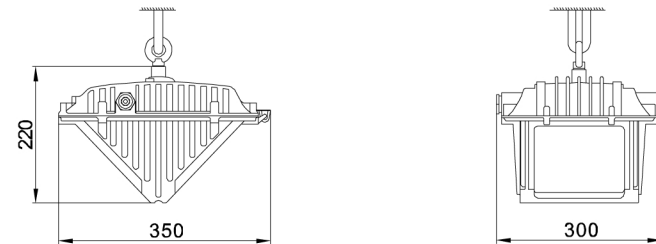

Ex Code: Ex d I
Standard: GB3836.1, GB3836.2, MT221

