

LED



IP65

-40°C

+50°C



E27



Application

- 1) Approved for safe use in the explosive environment under the coal mine where the methane and the explosive dust exist.
- 2) It is the idea spotlight solution for the monitoring position, construction site etc.

Characteristics

- Equipped with World famous brand light source with reliable performance, gives 20% more light over the other manufacturer's
- The average life span of the light source is as long as 10,000 hours, low maintenance.
- The well designed transparent parts make the light more gentle .It avoids the double image and the eyestrain caused to the workers' eyes.
- The lamp head with directional flexibility can be rotated 90° vertical tilt to the users desired location.
- The surface of the housing is subjected to a hi-tech finishing spraying treatment. It has Strong resistant to corrosion, water and dust, applicable to various harsh environments.
- Multiple mounting options: wall mounting, ceiling mounting, seater-mounting etc.


Main specification

Input Voltage	127VAC
Frequency	50Hz
Ingress Protection	IP65
Anti Corrosion Grade	WF2
Insulation Grade	I
Space Height Ratio	4
Leading-in Cable Diameter	φ 8mm - φ 14mm
Dimension	Lamp: 242x180x320 mm
	Ballast Box: 340x220x88 mm
Net Weight	Lamp: 4.3Kg
	Ballast Box: 4.1Kg



Ordering reference

Ordering reference	Light Source	Rated wattage (W)	Light output (lm)	Lamp average life(hours)
DGS70/127B(A)	Metal Halide Lamp	70	5,500	10,000


Light distribution curve

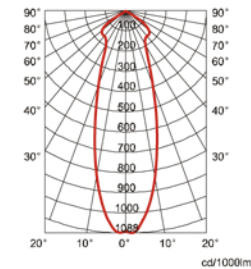

Drawing of dimension (Dimensions in mm)

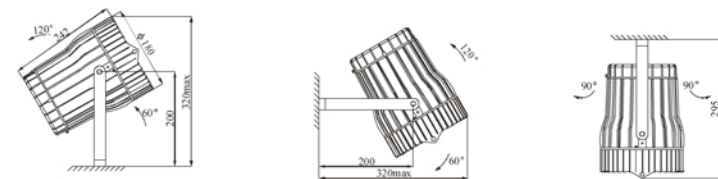

Mounting Hole Drawing



Explosion-proof Ballast Box