Hijra'

LED

IP67

-20°C

+50°C

LED light source(CREE) **Side switch**

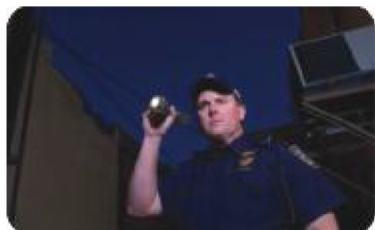**Recharge hole** **Attacker**

Charger **Package**

Application

It is widely used in the public security department, railway, military, police, transportation, civil aviation, inspection and customs preventive officer etc.

Characteristics

■ The flashlight has a special attack head design. It is perfect for security defence. It is also anti skidding.

■ It uses CREE LED light source ,with long life span. It is high efficiency and environment friendly.

■ The flashlight have three modes as high/low/ strobe. The user feel free to transfer between these modes.

■ The flashlight is well sealed, water proof to 1 meter. Its high strength aluminium alloy housing makes the flashlight resist to harsh impact.

■ Recharging and discharging are controlled by intelligent chip, safe and efficient, with various protection.

■ ZW7710 equipped with two chargers, 100-240VAC charger and 12V car charger

■ Generally, ZW7710A don't have 12V car charger, We can provide 12V car charger for ZW7710A as customers' requirement.

Main specification

Specification	Unit	ZW7710	ZW7710A
Rated voltage	VDC	3.7	3.7
Charging Voltage	VAC	100-240	100-240
Rated power	W	3	1
Rated capacity	Ah	2.2	2.2
Light Output (High)	lm	≥248	≥110
Light Output (Low)	lm	≥95	≥70
Runtime (High)	h	≥3	≥9
Runtime (Low)	h	10	19
Recharging Time	h	6	6
Effective Beam Range	m	200	120
Service Life	h	100,000	100,000
Battery Recharge Cycle	Times	≈1,000	≈1,000
Diension	mm	φ35×150	φ35×150
Net weight	g	190	190

Drawing of dimension (Dimensions in mm)

Switch

$\phi 35.8mm$

Charge terminal

150mm